

Cub
Crests

FASHION LAMINATES

Wellness

Acrylic Surfaces

ANTI YELLOW



6H

ANTI SCRATCH
HARDNESS




Wellness

Acrylic Surfaces

SIZE -2440x1220mm

THICKNESS -1.5mm



**High Gloss
Finish**




**Easy to
Clean**




**Anti Bacterial
Surface**




**Scratch
Resistant**




**100%
Pure Acrylic**




**Stain
Resistance**

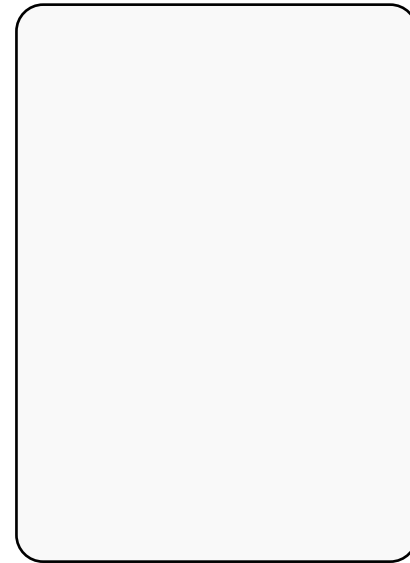


GLS - 901

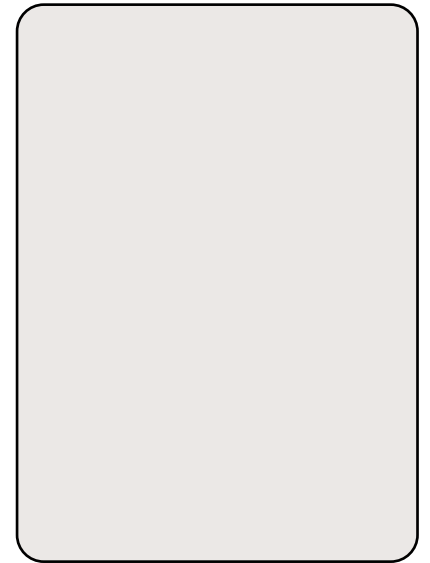


GLS - 902

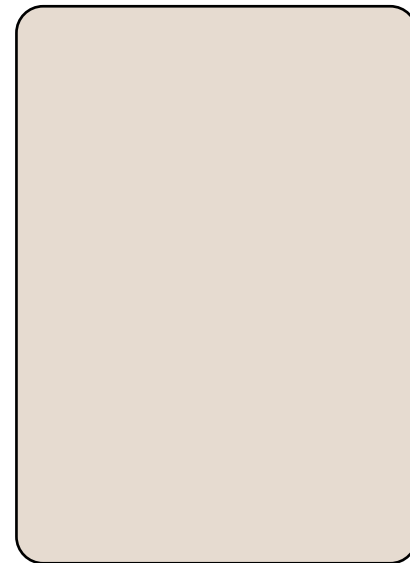

GLS - 903

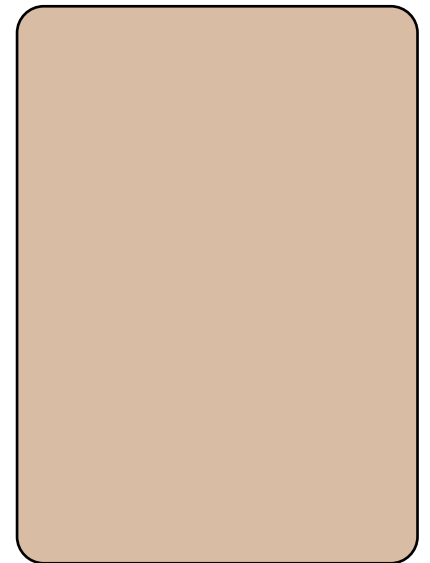

GLS - 904

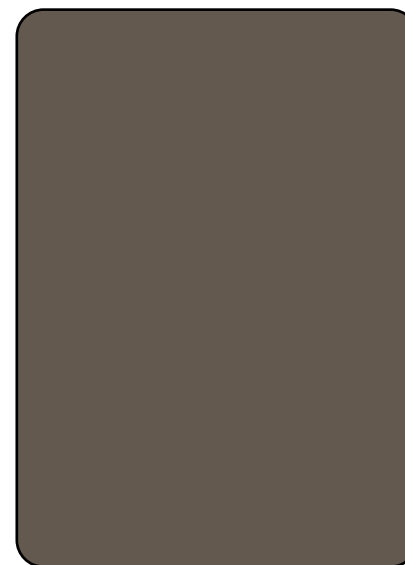

GLS - 905




GLS - 906




GLS - 907




GLS - 908

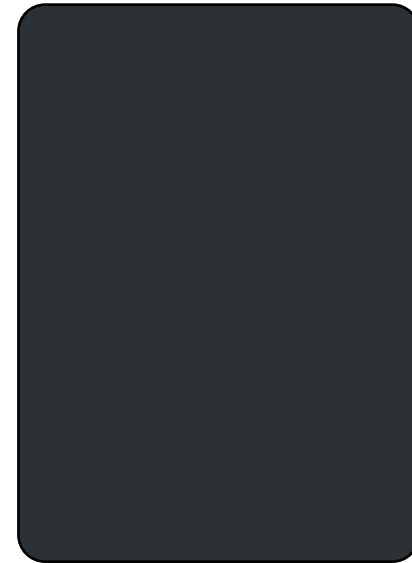

GLS - 909

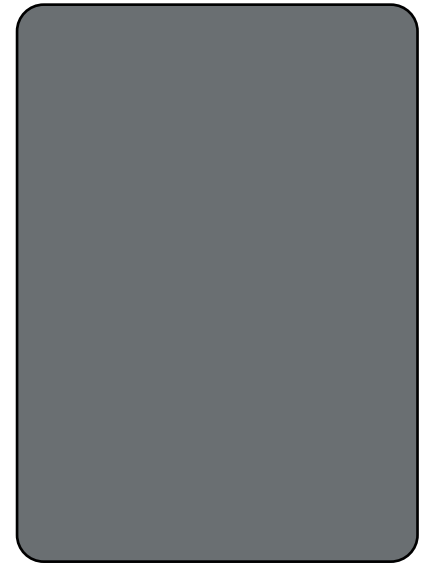


GLS - 910

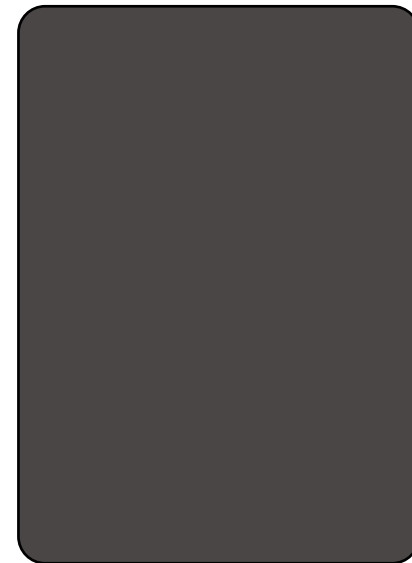


GLS - 911



GLS - 912

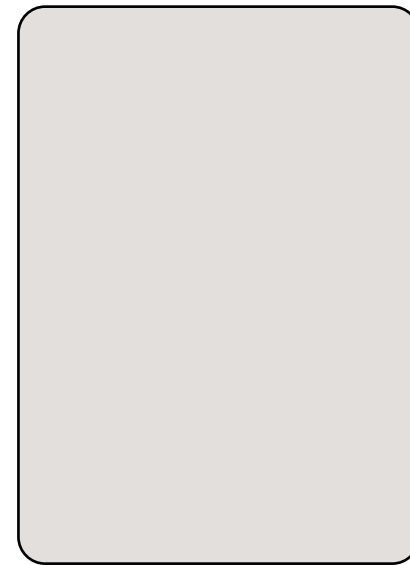


GLS - 913

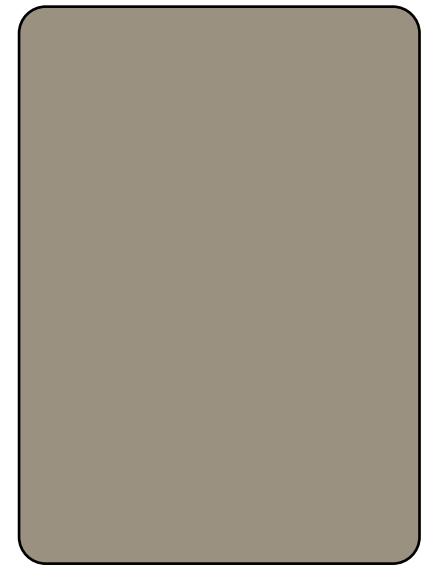


GLS - 914




GLS - 915

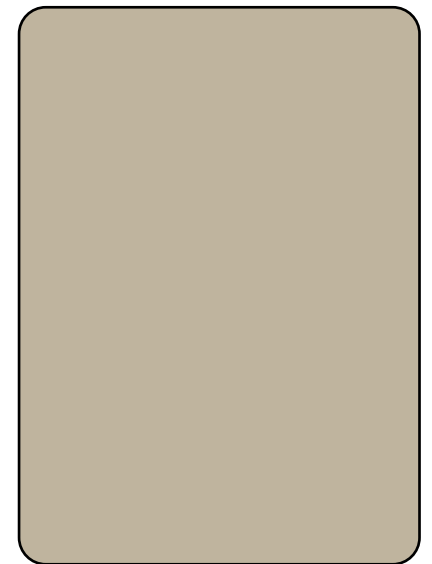


GLS - 916

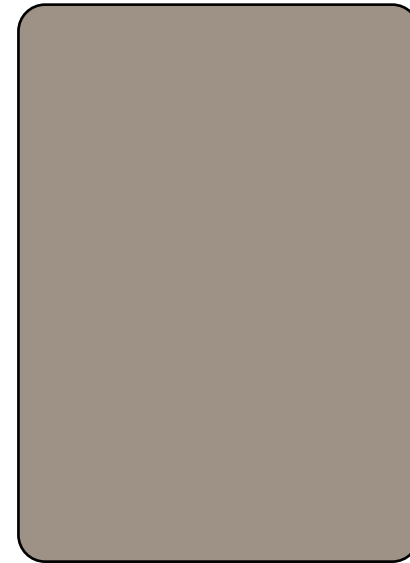


GLS - 917

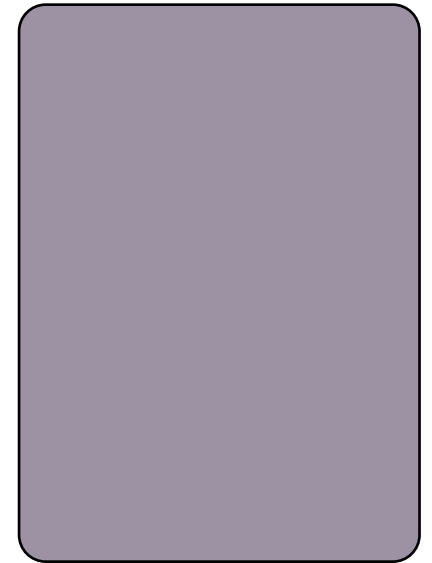


GLS - 918

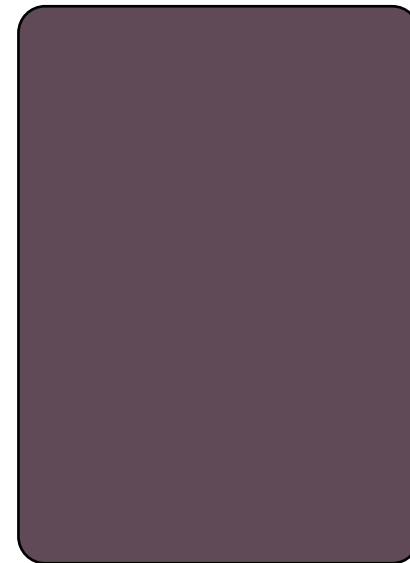


GLS - 919

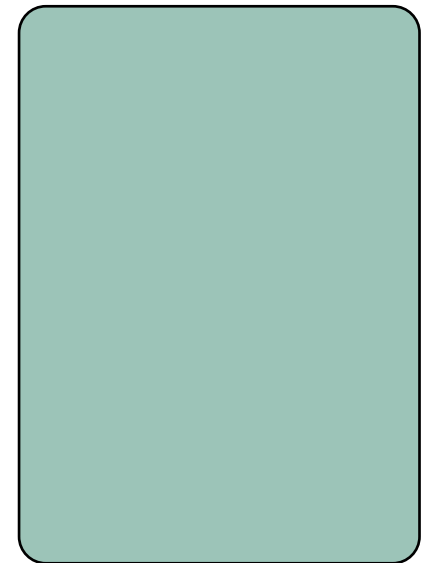


GLS - 920

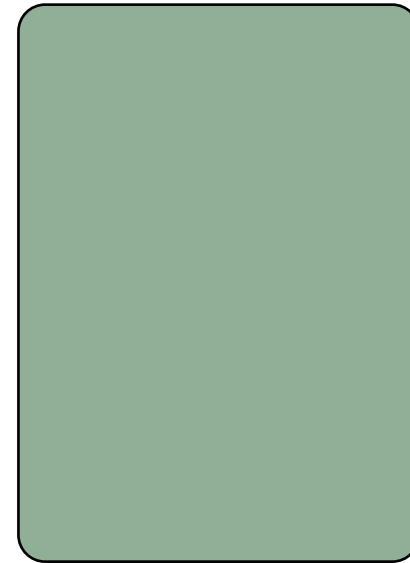


GLS - 921

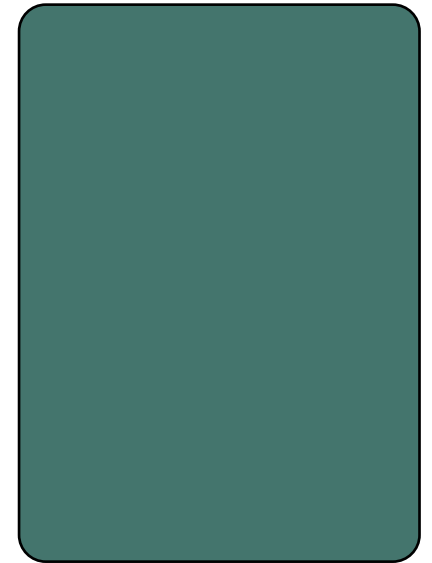

GLS - 922

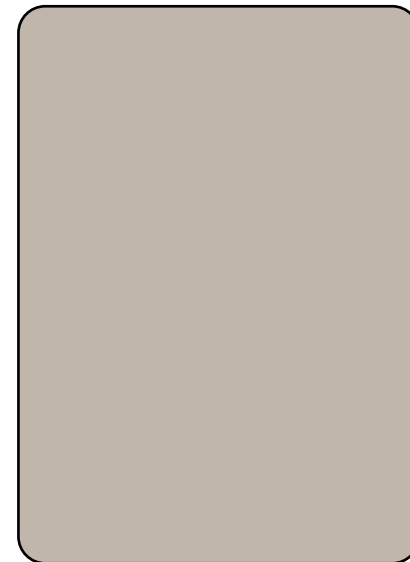


GLS - 923

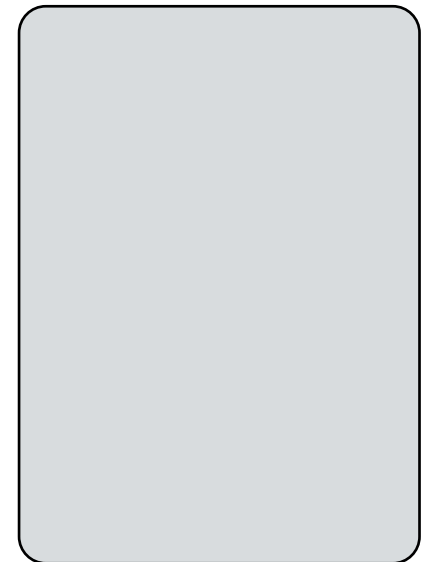


GLS - 924



GLS - 925

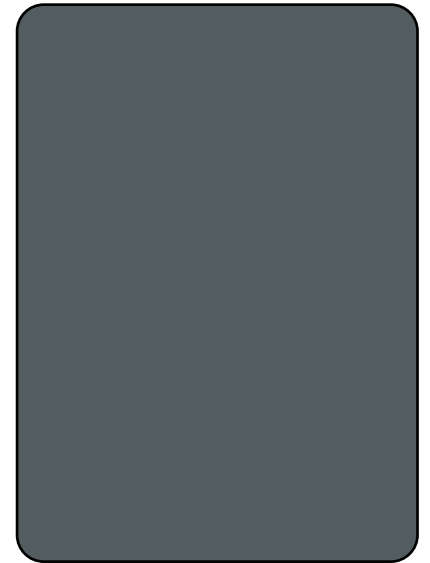

GLS - 926

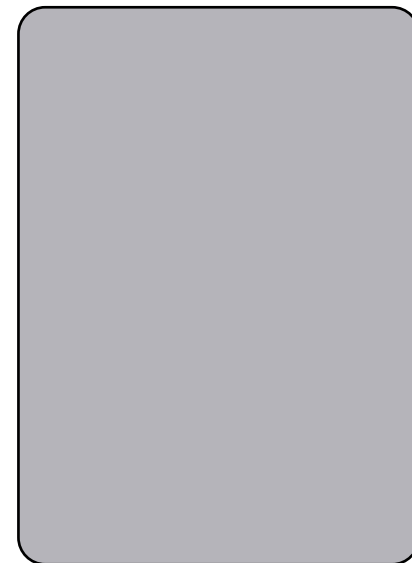

GLS - 941



GLS - 942



GLS - 943



GLS - 944



GLS - 945



GLS - 946

Cub Crests, erstwhile with Greenply Industries Ltd, Incorporated as a separate legal entity wef Sept 2025

Cub
Crests
FASHION LAMINATES

Wellness

Fluted Acrylic Surfaces

ANTI YELLOW



6H ANTI SCRATCH
HARDNESS




Wellness

Fluted Acrylic Surfaces

SIZE -2440x1220mm

THICKNESS -2.5mm



**High Gloss
Finish**




**Easy to
Clean**




**Anti Bacterial
Surface**




**Scratch
Resistant**




**100%
Pure Acrylic**




**Stain
Resistance**

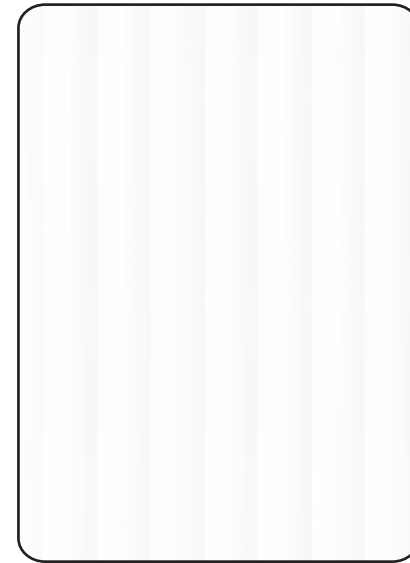


GLS - 951

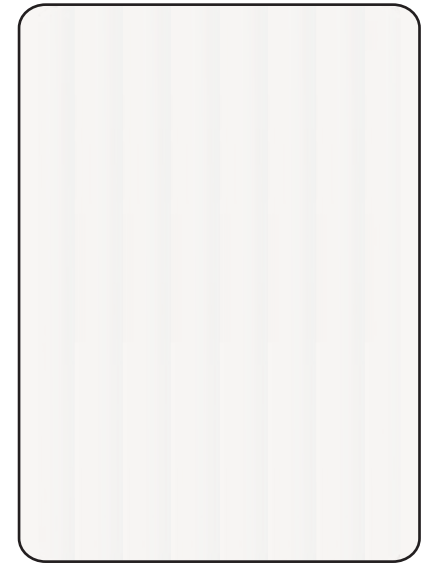


GLS - 952

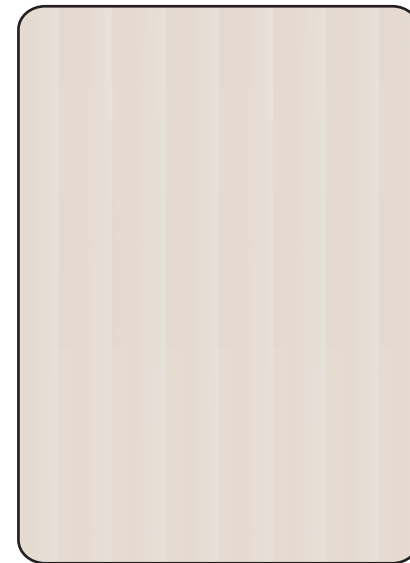


GLS - 953

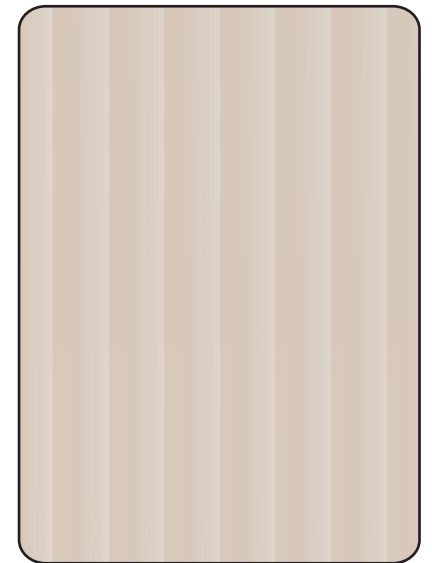


GLS - 954

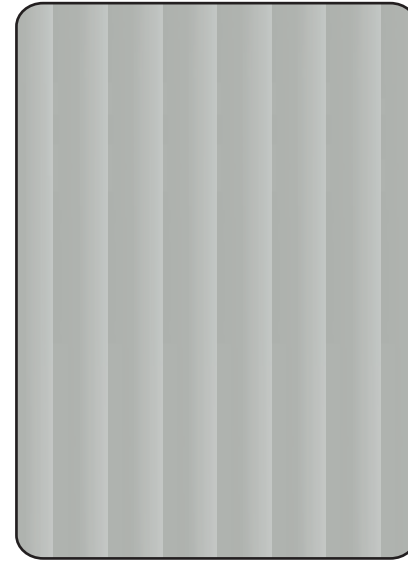


GLS - 955

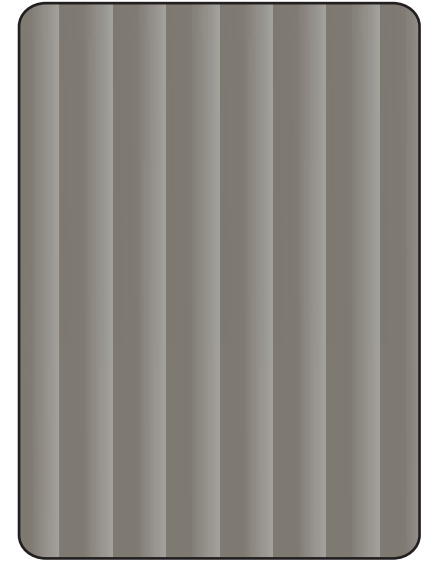


GLS - 956

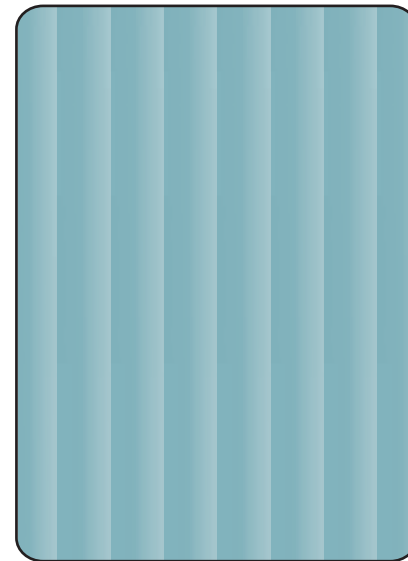


GLS - 957

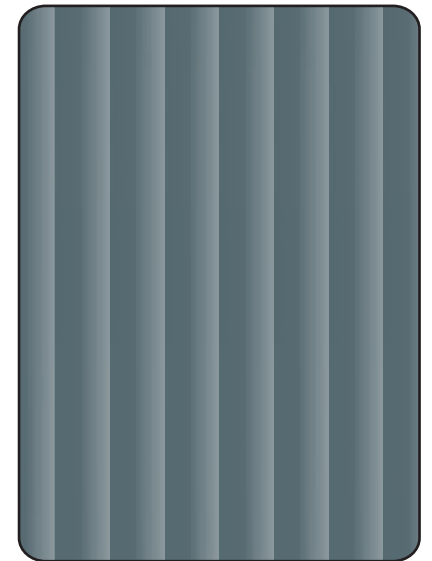


GLS - 958

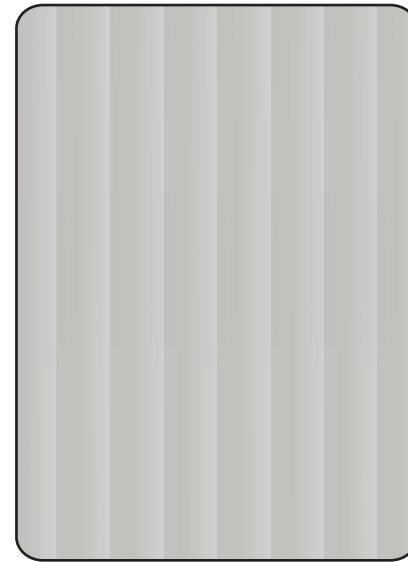


GLS - 959

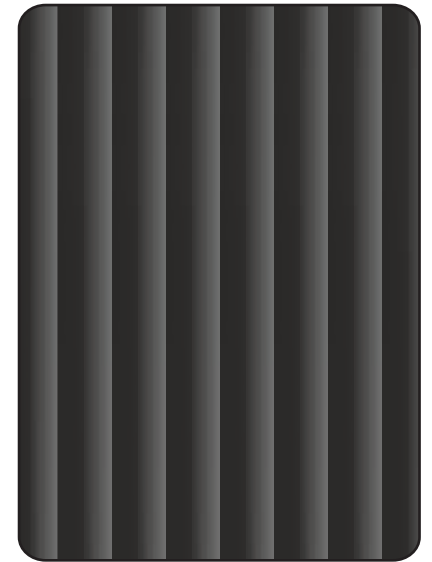


GLS - 960

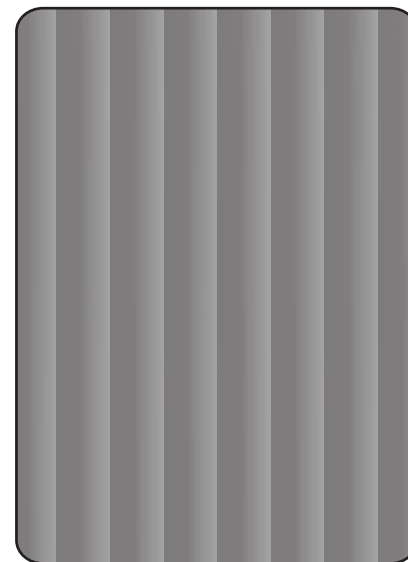


GLS - 961

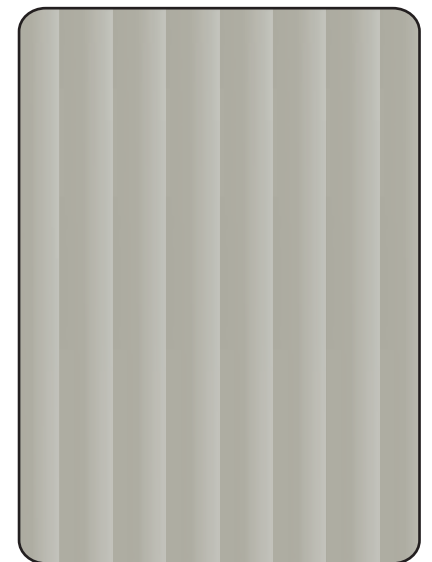

GLS - 962

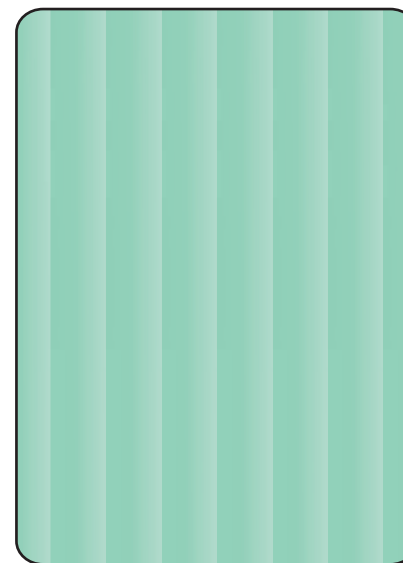

GLS - 963

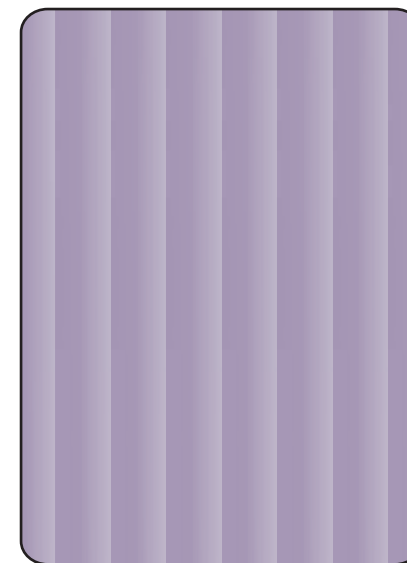

GLS - 964



GLS - 965



GLS - 966



GLS - 967



GLS - 968



GLS - 969



Technical Specification

Parameter	Wellness Acrylic Laminate	High Gloss Laminate Mica	PU Coating/ Duca Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Anti Scratch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
Dry Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

Reasons For Air Bubble Formations On Laminates:

- Laminates Are Bonded an Extremely Humid Conditions
- Use of water base syrihetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)
- When Subitrate loses Moisture Afterinstallation.
- Debonding In Certain Areas Because Of Uneven Substrate Surface
- Use Of Extremely Large Acrylic/pve Laminate Sheets fmore Than 8 Ft X 2 Long)
- Insufficient Or Lack Of Pressing During The Bonding Period Of Laminate
- Exposure To Direct Sunlight Can Gravely Affect A Laminate's Appearance
- Use Of inferior Or Sub-standard Dipped Plywood Or Dipped Lipping Putti, Which May Chemically React With The Adhesive
- The Use of Synthetic Rubber Adhesives Such As Sr/Jat Pat, Bostic, Heats, Etc.
- Prolonged Exposure To High Temperature (above 30° 35°c
- If Hot Cookware Or Utensils Are Directly Places On The Laminate

The Company Is Not Responsible For Any Kind Of Complains Regarding Damage Of The Furniture For Laminates The Resins Seen Here Can Have Many Possibilities Like tryferior Quality Of Plywned, Any Mistake While Using It The Company Is Responsibile Only Till The Sheet is Not Lised

HOW TO CARE

- Cleaning Should Be Done With Water And Clean, Non-abrasive Cloth
- To Remove More Stubborn Stain, Use Mild Household Cleansers Like Colin To Gently
- Wipe Down With A Non-abrasive Cloth
- Avoid The Use Of Abrasive Liquid Cleanser's, Bleaching Compounds Or Solutions
- As These May Damage The Surface Of The Laminate
- Do Not Place Hot Cookware Directly On The Laminate. Prolonged Exposure To Temperature Above 30 Degrees Celsius May Cause Damage To The Laminate Surface
- Do Not Use The Laminate For Purposes That It Is Not Intended For
- (E.g. Do Not Iron Chop, Hammer Or Expose The Laminate To Open Flame
- Outdoor Application Of The Laminate With Exposure To Direct Sunlight And Conditions Are Not Recommended
- UV Rays May Be Shaping The Laminate
- Gloss Surface Are Recommended Only For Vertical Application
- Peel Off The Protective Film After Processing
- Have A Thickness Balance Of +\ - | 0%

LIMITED WARRANTY

Cub Crests Products Are Tested To Be Reasonably Free Of Defects, And When Used And Fabricated Properly They Will Comply With

The Applicable Manufacturing Specifications Within Realistic Deviations. We Recommend Customers To Inspect Properly Before Installing. Cub crests Warranty In On Way Covers Defects And Non-compliance Or Otherwise Attributable To Any Other Causes, Including Without Limitation The Following:

- Improper Handling / Transportation / Storage.
- There Will Be No Guarantee Or Exchange Under Any Circumstances Improper Installation.
- Color Variations In Products From Different Batches Are Possible,
- Improper Or Unintended Usage.
- We Recommend using Products From Same Batch To Avoid Color Variations.
- lack Of Or Improper Maintenance.
- This Brochure Is For Presentation Purpose Only.
- Exposure To High Temperatures.
- unauthorized Alteration To The Products.
- Outdoor Applications.
- Exposure To Direct Sunlight Can Gravely Affect A Laminate's Appearance ,
- use Interior Or Sub-standard Dipped Plywood Or Dipped Lipping Patti.which May Chemically React The Adhesive.
- The use Of Synthetic Rubber Adhesives Such As Sr / Jat Pat, Bostic, Heatex, Etc.
- Prolonged Exposure To High Temperature (above 30c - 35c).
- If Hot Cookware Or Utensils Are Directly Placed On The Laminate.
- TO Avoid The Inside Cracks 8 Stretch Line, DO Not Store Acrylic Sheet In Roll From.

DISCLAIMER

- Do Not Use Plywood With High Moisture Content
- Do Not Use Ply With Uneven Surface.
- Avoid Using Interior Quality Adhesive.
- Apply Sufficient Pressure
- We Do Not Recommend Pasting Of Sheets On The Printed/branding Area Of The Plywood.

There Can Be Colour Variation From Different Batches.

It to Avoid Colour Variations. Actual Colour Of The Acrylic Sheet May Vary From This Brochure

Cub Crests in association with Zoo Authority of Karnataka (ZAK)
has pledged its support towards the care & adoption of rescued Cubs.

Cub Crests has taken the initiative of donating a portion of its sales proceeds to the
"CARE FOR THE CUB"
mission

Born of Class
Built with Pedigree
www.cubcrests.com



Cub Crests Speciality Products Private Limited

#19, Ground Floor, 22nd Cross, MRCR, Govindrajnagar, Bangalore-560040

Mob: +91 7411640999, Email: info@cubcrests.com

